

ROBUST, HIGH PRECISION USB TEMPERATURE AND HUMIDITY SENSOR

TRH450

DESCRIPTION

The TRH450 is designed for environmental temperature and humidity acquisition, requiring enhanced precision and an extended temperature range. Thanks to its factory-calibrated, linearized, and temperature-compensated digital sensor chip, it is field interchangeable. Its compact aluminum probe also includes extra physical protection for harsh environmental conditions, and an internal filter protects against dust, soot, and other contaminants. Its thin probe eases integration, even in space-constrained locations.

APPLICATIONS

- OEM
- Greenhouse
- Server rooms
- Manufacturing
- Pre-certification
- LIMS integration
- Humidity control
- Scientific research
- Building automation
- Engineering and R&D
- Environmental chamber

INSTALLATION TIME

Less than 10 minutes

UNIQUE SERIAL NUMBER

Each unit is assigned a unique serial number allowing for traceability and certification

FREE DAQ SOFTWARE

Real-time data visualization and logging

DATA INTEGRATION

Command-line tools for direct data access and integration

OPTIONS

- Virtual COM Port (VCP) communication protocol
- 3-point user calibration mechanism

ALSO AVAILABLE

Traceability certificates

Warning: This product should not be used in applications where its failure may cause personal injury.

Note: While every effort has been made to ensure accuracy in this publication, no responsibility can be accepted for errors or omissions.

Note: Data may change without notification, and you are strongly advised to obtain copies of the most recently issued datasheet.

SPECIFICATIONS

Parameter	Condition	Value	Units
Temperature			
Operating range	-40 to 125	Max	- °C
Accuracy	20 to 60°C	Typ. Max.	±0.1 ±0.3 °C
Accuracy	-40 to 20°C	Typ. Max.	±0.2 ±0.3 °C
Accuracy	60 to 125°C	Typ. Max.	±0.4 ±0.6 °C
Accuracy	-40 to 125°C	Typ. Max.	±0.4 ±0.6 °C
Resolution	Typ.	0.015	°C
Repeatability	Typ.	0.06	°C
Response time	t63%	10	s
Factory calibrated	Individually ^[2]	yes	—
Long-term drift	Max.	<0.03	°C/yr
Relative humidity			
Operating range ^[3]	Non-condensing	—	0 to 100 %RH
Accuracy	0 to 55 %RH 25°C	Typ. Max.	±1.5 ±2 %RH
Accuracy	55 to 100 %RH 25°C	Typ. Max.	±2 ±3 %RH
Accuracy	0 to 100 %RH 0 to 80°C	Typ. Max.	±2 ±3 %RH
Resolution	Typ.	0.01	%RH
Hysteresis	25°C	0.8	%RH
Factory calibrated	Individually ^[2]	Yes	—
Long-term drift ^[3]	Typ., -40 to 70°C	<0.25	%RH/yr
Probe			
Operating range	-40 to 125		°C
Cable material	Silicone		
Cable length	1 (3)		m (ft)
First filter material	Anodized aluminum		
Sec. filter material	PTFE membrane		
Efficiency	Particle size ≥200 nm	99.99	%


SPECIFICATIONS

Parameter	Condition	Value	Units
Power supply			
Voltage	Powered through a USB port	5	V
Current consumption	At 5V	≤18	mA
Mechanical			
Dimensions	See schema below	—	—
Colour	—	Cyan	—
Weight (without USB cable)	—	50	g
Housing and USB cable			
Temperature operating range	—	0 to 70	°C
Humidity operating range	Non condensing	10 to 90	%RH
Material	—	ABS	—
IP rating ^[3]	—	51	—
System galvanic isolation	—	None	—
USB cable length	—	1 (3)	m (ft)
Miscellaneous			
ADC resolution	—	16	bits
Long-term stability	Maximum	0.03	°C
Temperature compensated	By the manufacturer	Yes	—
Lifetime	—	5	years
Certification(s)			
RoHS	RoHS3	Yes	—
CE	CE/REACH	Yes	—

^[2] Each sensor is individually conditioned by the manufacturer of the semi-conductor sensor chips in the best stable conditions, and their correction coefficients are recorded for each of them.

^[3] If water condensation or splashing is possible, installing the probe pointing down is recommended to reduce the risk of water build-up in the sensor. If water splashing is possible, take extra precautions to protect the sensor and the cable converter. Depending on the application, extra housing may be required.


^[5] Typical value for operation in average relative humidity and temperature range. Maximum value is < 0.5 %RH/yr. Higher drift values might occur due to contaminant environments with vaporized solvents, out-gassing tapes, adhesives, packaging materials, etc. For optimal performance, keep the unit in a contaminant free (VOCs) and well ventilated area.

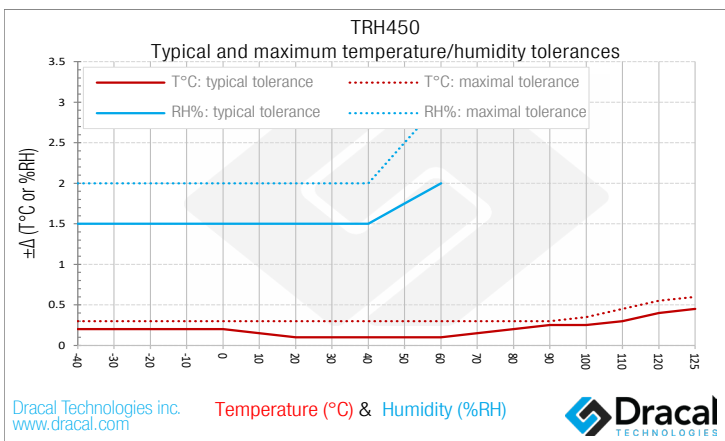

AVAILABLE CHANNEL(S) As displayed in our logging software			
CHANNEL ID*	DESCRIPTION	TYPE	NATURE
00	SHT31 Temperature	Temperature	Real
01	SHT31 Relative Humidity	Relative Humidity	Real
02	Dew point	Dew point	Virtual
03	Humidex	Humidex	Virtual
04	Heat index	Heat index	Virtual

* Channel ID as it appears in DracalView. Virtual channel IDs differ in DracalView and dracal-usb-get.

PRODUCT DIMENSIONS

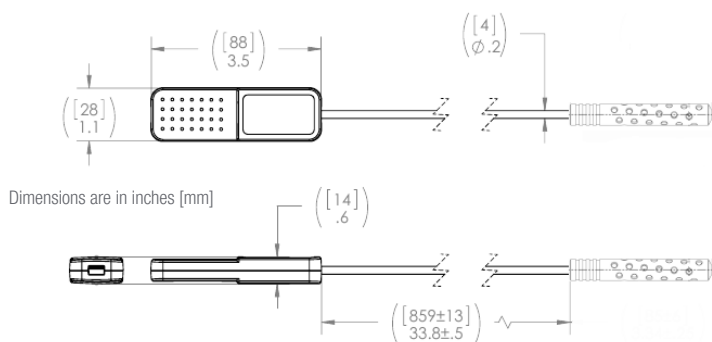

ORDERING

PRODUCT(S)

PART NUMBER	OPTION	DESCRIPTION
601034	USB-TRH450	Robust, high precision usb temperature and humidity sensor
608034	USB-TRH450-CAL	Robust, high precision usb temperature and humidity sensor - calibratable
603034	VCP-TRH450	Robust, high precision usb temperature and humidity sensor - with VCP mode
605034	VCP-TRH450-CAL	Robust, high precision usb temperature and humidity sensor - calibratable with VCP mode

TRACEABILITY CERTIFICATE(S)

NT1WT	1-point temperature certificate for one (1) unit
NT2WT	2-point temperature certificate for one (1) unit
NT3WT	3-point temperature certificate for one (1) unit
NT4WT	4-point temperature certificate for one (1) unit
NT1WH	1-point relative humidity certificate for one (1) unit
NT2WH	2-point relative humidity certificate for one (1) unit
NT3WH	3-point relative humidity certificate for one (1) unit
NT4WH	4-point relative humidity certificate for one (1) unit

CAUTION: Please remember that electromagnetic interference (EMI) may decrease the accuracy of the sensor. Avoid using this device near EMI sources such as motors, high-voltage transformers, and fluorescent tubes.

NOTE: Note that this product is not waterproof and requires protection if contact with water is possible.

TIP: Avoid installing the sensor in a location where strong vibration is likely to occur. Strong vibrations may cause slight inaccuracies in the reading.

TIP: Before using any precision measurement equipment, it is advised to power the unit for at least 15 minutes.

Sales:
sales@dracal.com

General Inquiries:
info@dracal.com

Technical Support:
support@dracal.com

Visit us at:
www.dracal.com

Dracal Technologies Inc.
7900 Taschereau Blvd.
Building A, suite 204
Brossard, QC, Canada
J4X 1C2