

## USB ATMOSPHERIC PRESSURE, TEMPERATURE AND RELATIVE HUMIDITY SENSOR

PTH200



### DESCRIPTION

The PTH200 is designed for environmental temperature, humidity and atmospheric pressure (barometric) data acquisition. Its core digital sensor chips are built around industry-proven technologies and are individually factory-calibrated, linearized and temperature-compensated, resulting in a cutting-edge performance. The compact probe eases integration, even in space-constrained locations, and the built-in particle filter provides protection against dust, soot and other contaminants.

### APPLICATIONS

- OEM
- Greenhouse
- Server rooms
- Manufacturing
- Pre-certification
- LIMS integration
- Humidity control
- Scientific research
- Building automation
- Engineering and R&D
- Environmental chamber

### INSTALLATION TIME

Less than 10 minutes

### UNIQUE SERIAL NUMBER

Each unit is assigned a unique serial number, allowing for traceability and certification.

### FREE DAQ SOFTWARE

Real-time data visualization and logging

### DATA INTEGRATION

Command-line tools for direct data access and integration

### OPTIONS

- Virtual COM Port (VCP) communication protocol
- 3-point user calibration mechanism

### ALSO AVAILABLE

Traceability certificates

**Warning:** This product should not be used in applications where its failure may cause personal injury.

**Note:** While every effort has been made to ensure accuracy in this publication, no responsibility can be accepted for errors or omissions.

**Note:** Data may change without notification, and you are strongly advised to obtain copies of the most recently issued datasheet.

### SPECIFICATIONS

Parameter	Condition	Value	Units
<b>Temperature (probe)</b>			
Operating range <sup>[1]</sup>	-40 to 70°C	Max -	°C
Accuracy	0 to 70°C	Typ. ±0.2	°C
		Max. ±0.4	
Accuracy	-40 to 0°C	Typ. ±0.3	°C
		Max. ±0.4	
Accuracy	-40 to 70°C	Typ. ±0.3	°C
		Max. ±0.4	
Resolution	Typ.	0.01	°C
Repeatability	Typ.	0.06	°C
Response time	t63%	10	s
Factory calibrated	Individually <sup>[2]</sup>	yes	-
Extended temperature range <sup>[6]</sup>	-45 to 80		°C
Long-term drift	Max.	<0.03	°C/yr
<b>Relative humidity (probe)</b>			
Operating range <sup>[3]</sup>	Non-condensing	- 0 to 100	%RH
Accuracy	0 to 90 %RH	25°C Typ. ±2	%RH
		Max. ±2.5	
Accuracy	90 to 100 %RH	25°C Typ. ±2.5	%RH
		Max. ±3.5	
Accuracy	0 to 100 %RH	0 to 70°C Typ. ±2.5	%RH
		Max. ±3.5	
Resolution	Typ.	0.01	%RH
Hysteresis	25°C	0.8	%RH
Factory calibrated	Individually <sup>[2]</sup>	Yes	-
Long-term drift <sup>[5]</sup>	Typ., -40 to 70°C	<0.25	%RH/yr

### SPECIFICATIONS (continued)

#### Atmospheric pressure

Sensor location	Inside the USB interface housing		
Operating temperature range	-	-20 to 70	°C
Operating pressure range	For full accuracy		45 to 110 kPa
Accuracy	70 to 110 kPa	25°C	Max. ±0.15 kPa
Accuracy	70 to 110 kPa	10 to 40°C	Typ. ±0.18 kPa
Accuracy	45 to 110 kPa	0 to 50°C	Max. ±0.2 kPa
Accuracy	45 to 110 kPa	-20 to 70°C	Max. ±0.35 kPa
Extended pressure range <sup>[6]</sup>	Linear range of ADC		1 to 120 kPa
Overpressure	Pmax		600 kPa
Altitude resolution <sup>[4]</sup>	-	≈10	cm
ADC resolution	-	24	bits
Response time	-	0.5	s
Factory calibrated	Individually <sup>[2]</sup>		Yes -
Signal Noise Filter	1 <sup>st</sup> order		- -
Noise	-	±0.0065	kPa
Long term drift	-	±0.1	kPa/yr

#### Probe



Cable material	PVC		
Cable length	-	1 (3)	m (ft)
First filter material	Polyethylene terephthalate mesh (PET)		
Sec. filter material	PTFE membrane		
Efficiency	Particle size ≥200 nm	99.99	%

#### Housing and USB cable

Temperature operating range	-	-20 to 70	°C
Humidity operating range	Non condensing	10 to 90	%RH
Material	-	ABS	-
IP rating <sup>[3]</sup>	-	51	-
USB cable length	-	1 (3)	m (ft)

SPECIFICATIONS (continued)			
Parameter	Condition	Value	Units
<b>Power supply</b>			
Voltage	Powered through a USB port	5	V
Current	At 5V	15	mA
<b>Miscellaneous</b>			
Temperature compensated	By the manufacturer	Yes	–
Lifetime	–	5	years
<b>Certification(s)</b>			
RoHS	RoHS3	Yes	–
CE	CE/REACH	Yes	

- <sup>[1]</sup> Only if the cable is not moved/flexed while the temperature is below 0°C.
- <sup>[2]</sup> Each sensor is individually conditioned by the manufacturer of the semi-conductor sensor chips in the best stable conditions, and their correction coefficients are recorded for each of them.
- <sup>[3]</sup> If water condensation or splashing is possible, installing the probe pointing down is recommended to reduce the risk of water build-up in the sensor. If water splashing is possible, take extra precautions to protect the sensor and the cable converter. Depending on the application, extra housing may be required.
- <sup>[4]</sup> In a fully controlled environment.
- <sup>[5]</sup> Typical value for operation in average relative humidity and temperature range. Maximum value is < 0.5 %RH/yr. Higher drift values might occur due to contaminant environments with vaporized solvents, out-gassing tapes, adhesives, packaging materials, etc. For optimal performance, keep the unit in a contaminant free (VOCs) and well ventilated area.
- <sup>[6]</sup> Avoid exposing the sensor to extended periods outside its operating range to prevent damage. Precision is not guaranteed beyond the specified operating ranges.

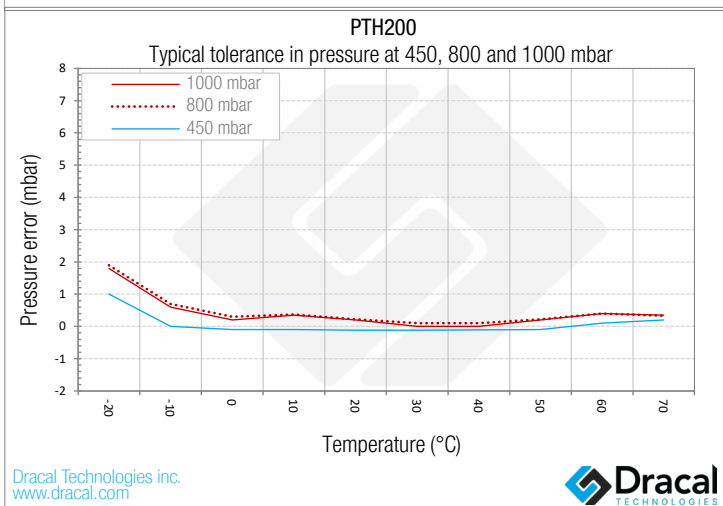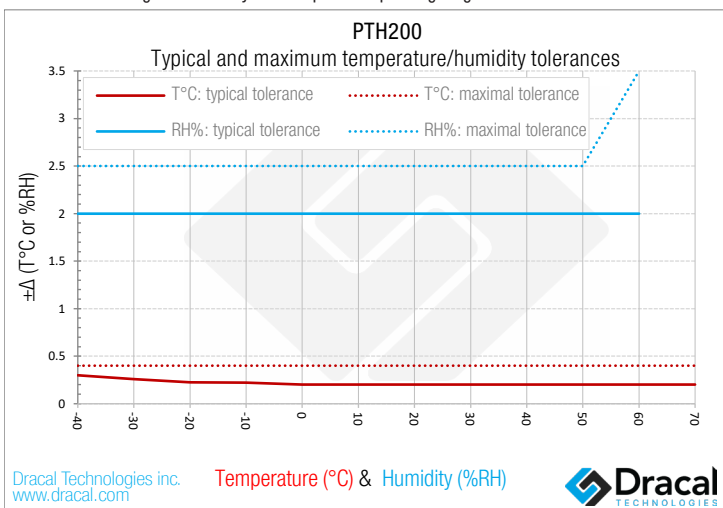

**CAUTION:** Please remember that electromagnetic interference (EMI) may decrease the accuracy of the sensor. Avoid using this device near EMI sources such as motors, high-voltage transformers, and fluorescent tubes.

**NOTE:** Note that this product is not waterproof and requires protection if contact with water is possible.


**TIP:** Avoid installing the sensor in a location where strong vibration is likely to occur. Strong vibrations may cause slight inaccuracies in the reading.

**TIP:** Before using any precision measurement equipment, it is advised to power the unit for at least 15 minutes.

AVAILABLE CHANNEL(S) As displayed in our logging software			
CHANNEL ID*	DESCRIPTION	TYPE	NATURE
00	MS5611 Pressure	Pressure	Real
01	SHT31 Temperature	Temperature	Real
02	SHT31 Relative Humidity	Relative Humidity	Real
03	Dew point	Dew point	Virtual
04	Humidex	Humidex	Virtual
05	Heat index	Heat index	Virtual
06	Altitude	Height	Virtual

\* Channel ID as it appears in DracalView. Virtual channel IDs differ in DracalView and dracal-usb-get.

## PRODUCT DIMENSIONS

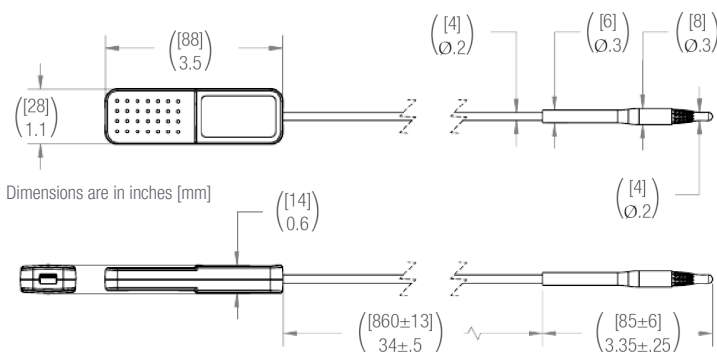

## ORDERING

PRODUCT(S)		
PART NUMBER	OPTION	DESCRIPTION
601014	USB-PTH200	USB Atmospheric pressure, temperature and relative humidity sensor
608014	USB-PTH200-CAL	USB Atmospheric pressure, temperature and relative humidity sensor - calibratable
603014	VCP-PTH200	USB Atmospheric pressure, temperature and relative humidity sensor - with VCP mode
605014	VCP-PTH200-CAL	USB Atmospheric pressure, temperature and relative humidity sensor - calibratable with VCP mode

## TRACEABILITY CERTIFICATE(S)

NT1WT	1-point temperature certificate for one (1) unit
NT2WT	2-point temperature certificate for one (1) unit
NT3WT	3-point temperature certificate for one (1) unit
NT4WT	4-point temperature certificate for one (1) unit
NT1WH	1-point relative humidity certificate for one (1) unit
NT2WH	2-point relative humidity certificate for one (1) unit
NT3WH	3-point relative humidity certificate for one (1) unit
NT4WH	4-point relative humidity certificate for one (1) unit
NT1WP	1-point pressure certificate for one (1) unit
NT2WP	2-point pressure certificate for one (1) unit
NT3WP	3-point pressure certificate for one (1) unit
NT4WP	4-point pressure certificate for one (1) unit
NT5WP	5-point pressure certificate for one (1) unit

Sales:  
[sales@dracal.com](mailto:sales@dracal.com)

General Inquiries:  
[info@dracal.com](mailto:info@dracal.com)

Technical Support:  
[support@dracal.com](mailto:support@dracal.com)

Visit us at:  
[www.dracal.com](http://www.dracal.com)

Dracal Technologies Inc.  
7900 Taschereau Blvd.  
Building A, suite 204  
Brossard, QC, Canada  
J4X 1C2